Intercom & Access Control Security System Specifications

Door Entry Station (B-P00F1-D)

An intercom and access control security system designed to meet the common requirements of a multi-family building security. The system consists of entry door stations, internal communication stations and a power and switching panel. This specification describes a selected entry station.

Wall mounted stations are available in two configurations and may be flush or surface mounted.

4 x 1 Frame

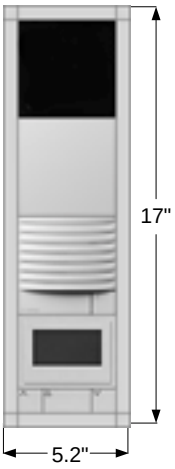

Module Descriptions

VTMM611-0 **Video Peephole Camera** – A monochrome camera with integrated infrared lighting. The camera is integrated invisibly behind a black module front and cannot be swiveled.

BTLM650-02 **Door Loudspeaker**- Weather-proof module with floating low current light button and illuminated light symbol. Also, equipped with volume controller for the loudspeaker. Providing full duplex voice communication to each internal handset station.

DRM611-0 **Display Module** –An input unit with display function for entering door calls. Two buttons are provided to permit scrolling within the index of names. Once the required name appears in the display, the door call is placed by pressing the call button with the bell symbol. Module Call button and lighting features are clearly designed and simply arranged. With doorbell ring to each internal handset stations.

BVSM650-0 **Bus Video Transmission Module** – Weather-proof Vario blank module connects the door loudspeaker and video camera components to the 2-wire bus. As well as transmission of the audio and video signal, the power supply and the horizontal and vertical control for the camera use the 2-wire bus.

ZDS601-0 **Anti-Theft Safeguard Accessory** –A two state solenoid magnet for integration into the mounting frame together with a stable metal plate is used to lock the release mechanism. This solenoid lock and electronic controller prevents the removal and theft of modules.

Available Colors – Silver Metallic, White, Titanium Metallic and Graphite Brown Metallic

Wall Mounting Options

Flush Mounting



Mounting Standards (ADA Standards – 28 CFR Part 36 7/1/94)



Mount the top of the frame combination shown above at 52" where a disabled person will reach forward or at 56" were a disabled person will reach from the side.

This will place the speaker button and call button at heights that will meet ADA standards (28 CFR Part 36 7/1/94).

Parts List

Qty	Part #	Description
1	BTLM 650-02	Door loudspeaker
1	DRM 611-0	Display module
1	BVSM 650-0	Bus video transmission module
1	VTMM 611-0	Video Peephole Camera
2	ZDS 601-0	Anti-theft lock
1	KR 611 4/1-0	Flush mount frame
1	MR 611 4/1-0	Mounting frame
1	GU 611 4/1-0	Flush mount housing

SSS SIEDLE

750 Parkway
Broomall, PA 19008
Tel. 610 353 9595
Fax 610 353 9716
Email: info@siedleusa.com
Web: www.siedleusa.com